

# Bias Q5

---



The four-channel Bias Q5 DSP amplifier provides reliable premier-grade power and headroom in the smallest possible package size. Specially designed with versatility and ease of use in mind, it's equally suitable for most bass enclosures, as well as high-power, full-range systems in any configuration. Total integration with the Armonia Pro Audio Suite™ enables a new power management experience on smartphones and tablets.

## Key features

- Innovative power supply design
- Flexible routing and mixing
- Four input channels with physical analogue and digital AES3 connectors for maximum flexibility
- Customisable input backup policy to automatically switch input source in case of signal failure for improved reliability
- Complete user interface integrated into Armonia Pro Audio Suite™
- WiFi remote monitoring through mobile devices
- Top-grade DSP with high dynamic range and extensive feature set
- Multi-stage signal processing
- Input and output IIR, FIR, IIR+FIR equalizers and raised-cosine filters
- Complete sets of limiters (peak, RMS voltage, RMS current, and TruePower™)
- Speaker cable loss compensation with Active DampingControl™
- Full protection circuitry: over/under AC voltage; troublesome signals (clipping, VHF, long-term RMS); DC; thermal; short circuit; and mute at power on/off

## Applications

- Bar, club, lounge
- Corporate and AV
- Indoor and outdoor dance events
- Large-scale touring
- Live music venues.


# Bias Q5

Channel Handling	
Number of output channels	4 mono, bridgeable per ch. pair
Number of input channels:	
Analog	4 (4x XLR)
AES3	4 (2x XLR)

Audio	
Output Noise A-Weighted @ 8 Ω - Analog to Analog / Digital to Analog	< -70.0 dBV
Dynamic Range A-Weighted @ 8 Ω - Analog to Analog / Digital to Analog	114,3 dB
Damping Factor @ 8 Ω, 20Hz - 500Hz	> 5000
Slew Rate (input filter bypassed)	> 50 V/μs
Frequency Response ( -3 dB, 1 W @ 8 Ω)	5 Hz - 30 kHz
Crosstalk (1 kHz)	-70 dB
THD+N (from 0.1 W to Full Power)	< 0.5% (typical < 0.01%)
DIM (from 0.1 W to Full Power)	< 0.5% (typical < 0.01%)
Input Impedance	20 kΩ Balanced
Input Acceptance	+27 dBu

DSP	
AD converters	24 Bit Tandem™ @ 96 kHz 129 dB Dynamic Range - 0.00056 % THD+N
DA converters	24 Bit Tandem™ @ 192 kHz 121 dB Dynamic Range - 0.00084 % THD+N
Sample rate converter	24 Bit @ 44.1 kHz to 192 kHz 140 dB Dynamic Range - 0.0001 % THD+N
Internal precision	40 bit floating point
Delay	2 s + 100 ms for time alignment
Equalizer	Raised-cosine, custom FIR, parametric IIR: peaking, hi/lo-shelving, all-pass, band-pass, band-stop, hi/lo-pass
Crossover	linear phase (FIR), hybrid (FIR-IIR), Butterworth, Linkwitz-Riley, Bessel: 6 dB/oct to 48 dB/oct (IIR)
Limiters	TruePower™, RMS voltage, RMS current, Peak limiter
Damping control	Active DampingControl™

Construction	
Dimensions	483 mm x 44.5 mm x 495 mm (19.0 in x 1.75 in x 19.5 in)
Weight	15 kg (33.0 lb)

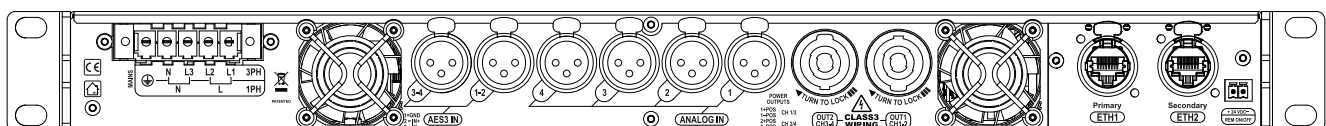

Output Stage	
Maximum output power per channel @ 8 Ω	1600 W
Maximum output power per channel @ 4 Ω	3000 W
Maximum output power per channel @ 2 Ω	5200 W
Maximum output power @ 8 Ω Bridged	6000 W
Maximum output power @ 4 Ω Bridged	10400 W
Peak total output, all channels driven	20000 W
Maximum unclipped output voltage	175 V <sub>peak</sub>
Maximum output current	130 A <sub>peak</sub>

The power figure is calculated by driving and loading symmetrically all the channels: uneven loads allow to achieve highest performance.

AC Mains Power	
Single-Phase	
Nominal Voltage	100 - 240 V @ 50/60Hz
Operating Range	90 - 264 V from DC to 200Hz
Power Factor 1/8 Maximum Output Power @ 4 Ω	> 0.9
Current Draw 1/8 Maximum Output Power @ 4 Ω	18 A <sub>rms</sub> @ 100V      9 A <sub>rms</sub> @ 240V
Suggested circuit breaker	C16

Three-Phase	
Nominal Voltage**	208Y/120 - 416Y/240 V, 3~, 3W+N+PE @ 50/60Hz 200 V~, 3W+PE @ 50/60Hz
Power Factor 1/8 Maximum Output Power @ 4 Ω	> 0.9
Current Drawn from Each Single Phase 1/8 Maximum Output Power @ 4 Ω	6 A <sub>rms</sub> @ 208Y      3 A <sub>rms</sub> @ 416Y
Suggested circuit breaker (per phase)	C10

Bi-Phase	
Nominal Voltage	200/100 V, 2W+PE @ 50/60Hz
Idle Consumption (all AC MAINS cases)	< 100 W
Max Consumption (all AC MAINS cases)	< 3500 W

\*\* Note: 208Y/120 V = 208 V phase-to-phase, 120 V phase-to-neutral

Thermal	
Operating temperature	0° - 15°C / 32° - 113°F
Cooling	Fan, continuously variable speed, temperature controlled
Thermal dissipation	
Single phase	115V      230V
1/8 Maximum Output Power @ 8 Ω	1127 BTU/h      1058 BTU/h
1/4 Maximum Output Power @ 8 Ω	2124 BTU/h      1639 BTU/h